

**Baranagar Municipality.
87, Desh Bandhu Road.
Kolkata-700035.**

NOTICE INVITING TENDER

(NIT No 86/BSUP-II/13-14 dt 07/02/2014)

Sealed tenders are hereby invited by the chairman, Baranagar Municipality for BSUP Ph 2 infrastructure work under JNNURM in different wards

Tender form can be downloaded from our official website	Time & Place of dropping	Date of Opening of Tender	Earnes money & cost of tender form
Upto 18.02.14 at 5.00 P.M.	up to 19.02.14 within 3.00 p.m. at this office	At 3.30 p.m. at this office on 19.02.14	a) Rs. As specified b) Rs. 200.00 in separate DD

Details of tender package are given below

**BSUP Scheme for the town of Baranagar (Phase-II), 24 Paraganas (North), West Bengal
INFRASTRUCTURE WORK
PACKAGE 1**

SL NO	NAME OF WORK	Drain Lenth Mt.	Rate	Amount	Road m2	Rate	Amount	Total	Earnest Money	Stipulated period
1	Pre. no 54 to 69/K New noa para 1 L P No 90/18/1 to pond									
2	L P no 90/11 to pond									
3	L P no 90/15/1 to Sahrid sangha 46 New noa para 1 to									
4	L P no 90/14/1/2 10 New noapara 1 to	342.00	1808.00	618336.00	1715.00	1314.00	2253510.00	2871846.00	57000.00	SIXTY DAYS
5	51 New noapara 1 54 New noa para to									
6	LP no 90/8 Pre no 1 to 23									
7	Harakrishna Pally POLE NO 144/8/2 TO									
8	81 N S NAGAR 158 N S NAGAR TO 150 N S NAGAR and LEFT RIGHT BY									
9										
10										

Handwritten signature

Handwritten signature

**BSUP Scheme for the town of Baranagar (Phase-II), 24 Paraganas (North), West Bengal
INFRASTRUCTURE WORK
PACKAGE 2**

S L NO	NAME OF WORK	Drain Length Mt.	Rate	Amount	Road m2	Rate	Amount	Total	Earnest Money	Stipulated period
1	156 S.S NAGAR-128 S.S. Nagar									
2	128S.S. NAGAR-287 S.S. Nagar									
3	297S.S. NAGAR-89 S.S. Nagar									
4	89 S.S. NAGAR- 61S.S. Nagar	430.00	1808.00	777440.00	1567.00	1314.00	2059038.00	2836478.00	56000.00	FIFTY DAYS
5	61S.S. NAGAR-3 S.S. Nagar									
6	3 S.S. Nagar - R.I. C. Bridge									
7	PRE. NO-11 NEW FORWARD COLONY TO 23 NEW FORWARD COLONY									
8	POLE NO 144/8/8 TO 65 N S NAGAR and RIGHT SIDE BY LANE									

20/12/14

11/02/15

**BSUP Scheme for the town of Baranagar (Phase-II), 24 Paraganas (North), West Bengal
INFRASTRUCTURE WORK
PACKAGE 3**

S L NO	NAME OF WORK	Drain Length Mt.	Rate	Amount	Road m2	Rate	Amount	Total	Earnest Money	Stipulated period
1	305 S.S. NAGAR TO 307 S.S. NAGAR									
2	169 S.S. NAGAR TO 289 S.S. NAGAR									
3	165 S.S. NAGAR TO 161 S.S. NAGAR									
4	LP-144/17 - 269, S.S. NAGAR									
5	146/AS S. NAGAR TO-138/3 S.S. NAGAR									
6	137 S.S. NAGAR TO-138/1, S.S. NAGAR									
7	117 S.S. NAGAR TO-195 S.S. NAGAR									
8	LP-144/13 TO 234 S.S. NAGAR									
9	106 S.S. NAGAR To 101 A S S NAGAR	661.00	1608.00	1195088.00	1349.00	1314.00	1772586.00	2967674.00	59000.00	SEVENTY DAYS
10	NEAR 91 S.S. NAGAR									
11	93 S.S. NAGAR TO 314 S S NAGAR									
12	89 S.S. NAGAR TO 312 S S NAGAR									
13	188 S.S. NAGAR TO 186 S.S. NAGAR									
14	41/1 S.S. NAGAR TO 36 A S S NAGAR									
15	POLE NO144/8/2/3 TO 81, NIRANJAN SEN NAGAR									
16	POLE NO-144/8/3 to 65 N.S. NAGAR									

11/2/14
Sharma

11/2/14
Sharma

**BSUP Scheme for the town of Baranagar (Phase-II), 24 Paraganas (North), West Bengal
INFRASTRUCTURE WORK
PACKAGE 4**

S.L NO	NAME OF WORK	Drain Lenth Mt.	Rate	Amount	Road m ²	Rate	Amount	Total	Earnest Money	Stipulated period
1	Near 37 S.S. Nagar									
2	Khal par 1/1 S.S. NAGAR to 252 S.S.nagar 307 S.S. NAGAR - 156 S.S.nagar			949200.00						
3	Pre no-23 Talbagan Colony to 37/2/6	525.00	1808.00		1183.00	1314.00	1567602.00	2516802.00	50000.00	THIRTY DAYS
5	A.K. Mukherjee Road PRE NO -3 NARAYAN PALLY TO 90									
6	Narayan Pally POLE NO- 144/8/2 - POLE NO 144/8/2/3									
7	AT NIRANJAN SEN NAGAR									

11/2/14

11/2/14

**BSUP Scheme for the town of Baranagar (Phase-II), 24 Paraganas (North), West Bengal
INFRASTRUCTURE WORK
PACKAGE 5**

S L NO	NAME OF WORK	Drain Length Mt.	Rate	Amount	Road m2	Rate	Amount	Total	Earnest Money	Stipulated period
1	MANDIR TO 322 N S NAGAR									
2	Pole no-144/8/16 to 274 N S NAGAR									
3	274 N S NAGAR TO 279 N S NAGAR AND RIGHT SIDE BY LANE	532.00	1808.00	961856.00	1525.00	1314.00	2003850.00	2965706.00	59000.00	SEVENTY DAYS
4	276 N NAGAR TO 286N S NAGAR AND RIGHT SIDE BY LANE									
5	POLE NO 144/8/14 TO POND and RIGHT SIDE BY LANE									
6	POLE NO 144/8/15 TO 276 N S NAGAR									

Devi
11/2/16

h. j. k. s. l. m. n. o. p. q. r. s. t. u. v. w. x. y. z.

**BSUP Scheme for the town of Baranagar (Phase-II), 24 Paraganas (North), West Bengal
INFRASTRUCTURE WORK
PACKAGE 6**

S L NO	NAME OF WORK	Drain Lenth Mt.	Rate	Amount	Road m2	Rate	Amount	Total	Earnest Money	Stipulated period
1	POLE NO 144/8/13 TO POLE NO 144/16/2 AT NIRANJAN SEN NAGAR POLE NO 144/8/12 TO 326 N S NAGAR and									
2	LEFT SIDE BY LANE POLE NO 144/8/11 TO 144/14/4 and RIGHT									
3	SIDE BY LANE POLE NO 144/8/10/0 TO 118 N S NAGAR	465.00	1808.00	840720.00	1566.00	1314.00	2057724.00	2898444.00	57000.00	SIXTY DAYS
4	and RIGHT SIDE BY LANE POLE NO 144/8/10 TO 104 N S NAGAR and									
5	RIGHT SIDE BY LANE POLE NO 144/8/9 TO 315 S S NAGAR									
6										

21/2/14
Chowdhury

14/02/14
Parashar

TERMS & CONDITION:-

1. Application for tender papers should be accompanied by attested copies of current IT return for Assessment Year 2013-2014, Vat and Professional Tax registration certificate & up-to-date payment of Professional Tax challan, PAN Card, EPF ESI registration no, credential in form of payment and completion certificate including copy of work order of a single work (similar type) amounting to minimum 50 percent (50%) of the tender amount .No applications should be received after the scheduled date and time.
- 2.The tender documents may be down loaded from the Municipal website and it must accompany Bank Draft is Rs. 200/- (Rupees two Hundred Only) in favour of Chairman, Baranagar Municipality separately along with separate requisite earnest money.
3. Earnest money @ 2.00% of the value of work in form of Demand Draft on any Nationalized Bank in favour of chairman, Baranagar Municipality, will have to be deposited during submission of tender. The earnest money of tenderer will be converted in to security money after acceptance. The security money will be released as per norms. No interest will be given on the earnest money & security money.
4. Rate should be quoted in percentage, both in figure and in words.
5. In connection with this works, no Arbitration will be allowed.
- 6.Incomplete tender will be rejected summarily. The successful tendered will have to execute a formal agreement on a non judicial stamp worth 10/- within 7 (seven) days from the date of issue of work order.
- 7.Before submission of tender, contractors must visit/inspect the work site at his own cost to assess the local situation/condition, approachable road etc. No plea/complain about the site, approach road etc. shall be entertained afterwards. It shall be presumed that the agency offered the rate after taking into account the entire position of the work site, approach road etc.

- 8. The offered rate should be inclusive of all sorts of incidental charges, levy, tax, cess, vat, carriage, loading, unloading, toll etc etc. No enhancement, additional claim, arguments for escalation of price shall be allowed after submission the tender. No mobilization / secured advance will be allowed.**
- 9. No single tender shall include more than one work, but contractors who wish to tender for two or more works shall submit a separate tender for each.**
- 10. The contractor shall have to carry out work with his own equipment and machinery and must supply cement test report , Brick test report , concrete cube test report from any Government organization against each work separately after completion of work .**
- 11. After opening of the tender, if required, the authority may invite rates.**
- 12. The successful tendered shall have to start the work “within seven days” from the date of issue of the work order and the work should be completed within the stipulated time failing which the earnest money may be forfeited and the work order may be treated as cancelled.**
- 13. Acceptance of the lowest tender is not obligatory & the undersigned reserves the right to accept any tender or to reject any or all tenders without assigning any reason and to split up tendered works to more than one contractor in the interest of speedy execution of the scheme.**
- 14. The undersigned reserves the right to alter the terms and condition of this notice at any time in the interest of public service only.**
- 15. Any above rate of the schedule rate of work will not be ordinarily entertained.**
- 16. The item of work for which Tender is submitted should be clearly mentioned along with “Chairman , Baranagar Municipality” on the cover and also in the tender paper.**

17. Schedule of work/supply will be prepared and measured as per approved P.W.D (W.B) schedule of Rates as Effective from 1st August 2010.

18. The undersigned reserves the right to forfeit the Earnest money and security deposited in the event of any short of breach of contract.

19. Contractor should put their firms / organization (signature of authorized signatory with official stamp) on each page of the tender document as token of approval.

20. Contractor is to note that non-compliance of any of the instructions will make their tender invalid.

21. All kinds of materials and labour related to the job will have to be arranged by the contractor and to be got approved by Engineer in charge or inspector before their use. The contractor at his own cost shall remove the rejected materials / workmanship from site within 24 hours.

22. The contractor at his own cost shall store all the materials which will be used for the work.

23. The quantities mentioned in the schedule of quantities approximately indicate the total extent of work, but may vary to any extent and some items may even be omitted. No claim whatsoever shall be entertained on this account.

24. If the Engineer in charge / authorized officer of the Municipality finds that the works is delayed by reason beyond the control of the contractor, the Engineer in Charge will make a fair and reasonable extension of time for completion of the contract with the written approval of the undersigned.

25. The contractor shall obtain certificate about satisfactory Completion of the work from the Engineer in Charge and submit the same along with the bills.

26. The work should be done in consultation with concerned Engineer.

27. Contractors have to produce certificate regarding registration for "All Risk Insurance Policies" to cover workman under Workman Compensation Act, loss / damage caused by natural calamities / accident collapse of partially completed work, materials and plant at site and for third party claims for injury / damages.

28. Before taking initiation of any extra item / excess quantity during the work, the same should be got approved by Engineer in Charge or Inspector.

29. On receipt of tender paper, Contractor should read carefully before submission the tender documents. No addition, alteration, omission, inclusion, deletion, amendment shall be allowed by any means.

30. A deduction of 1% cess for labour welfare as per Govt. norms in addition to normal deduction for IT and other purposes shall be made on every bill / claim by the agency.

31. Agency must submit cube test report (28 days), steel test report, cement test report from any Govt. testing center before bill.

32. Tender already entrusted with any departmental work and unable to complete the same within the schedule time may not be given any further work


mme
16/02/14
Finance Officer
Baranagar Municipality


16/02/14
Chairman
Baranagar Municipality


ESTIMATED FOR THE CONSTRUCTION OF STROM MASONRY DRAIN(300mm x 500mm)
Under BSUP SCHEME
(Based on P.W.D.C.Schedule Rate : 2010)North 24 pgs circle

Sl.No.	Description	Quantity	Unit	Rate	Per	Amount
						Rs.
1	Earth work excavation of foundation trenches. Item No-2(a) page - 1	0.639	Cum	73.77	Cum	47.14
2	Silver sand filling in foundation or plinth in layers compete. Item No-4(A) page - 5	0.062	Cum	583.05	Cum	36.15
3	Single Brick Flat Soling of picked jhama bricks, including ramming and dressing to proper level with powder earth Item No-1 page - 33	0.825	Sqm	264.31	Sqm	218.06
4	1:3:6 Cement Concreate with grded jhama khoa(30mm) Item No-4a, page -33	0.083	Cum	4326.01	Cum	359.06
5	25 mm Th. I.P.S. made with 2:1 cement and marble dust I-3 (ii) p-91	0.3	Cum	219.04	Cum	65.71
6	125 mm. thick Cement Brick work 4:1 29, Page - 73	0.525	Sqm	558.94	Sqm	293.44
7	1st class Cement Brick work 6:1 at foundation Item-No 22(a) Page-66	0.131	Cum	4073.37	Cum	533.61
8	15mm Cement plaster 4:1. I-2(ii) P-319 p-91	1.675	Sqm	123.41	Sqm	206.71
9	1.5mm thick neat cement puning Page -323 Item-8	1.675	Sqm	28.51	Sqm	47.75
TOTAL cost Rs.						1807.64

Cost per unit metre Length of surface drain (300x500)=1808.00 /-mt


Asst. Engineer, BSUP
MUNICIPALITY


Asst. Engineer
Divn-V B/F Section


Asst. Engineer (W)
Divn-V-Real Estate Section
K. M. D. A.
(68)

TYPICAL ESTIMATE FOR CEMENT CONCRETE ROAD

1/2,

TYPE -II (FOR 2.5 M wide Pathways
(Based on P.W.D.C.Schedule : 2010) North 24 pgs circle

Considering width - 2.50 Mtr.

Unit-Mtr Rate

Sl.No.	Description	Quantity	Unit	Rate	Per	Amount
						Rs.
1	Earth work excavation of foundation trenches, Item No-2(a) page - 1	0.875	Cum	73.77	Cum	64.55
2	Silver sand filling in foundation or plinth in layers compete. Item No-4(A) page - 5	0.2	Cum	583.05	Cum	116.61
3	Single Brick Flat Soling of picked jhama bricks, including ramming and dressing to proper level with powder earth Item No-1 page - 33	2	Sqm	264.31	Sqm	528.62
4	1:3:6 Cement Concrete with grded jhama khoa(30mm) Item No-4a, page -33	0.15	Cum	4326.01	Cum	648.90
5	M-20(3:1.5:1)Cement Concrete with stone Chips.100mm thick Item No-7(i) page - 39	0.200	Cum	5675.32	Cum	1135.06
6	1st class Cement Brick work 6:1 at foundation Item-No 22(a) Page-69	0.175	Cum	4073.37	Cum	712.84
7	Bitumenfiller for construction joints 2mt apart considering width 12mm,depth 100mm Item No 9 page no 451	0.0015	Cum	51498.18	Cum	77.25

Total Rs. 3283.83
Say- Rs 3284.00

Cost per square metre = Rs.3284 / 2.5 = Rs.1313.60 say Rs.1314/- per Squer metre.


Asst. Engineer
Asst. Engineer
Divn-V, R.E. Sector, KMDA

Supervising Engineer (W)
Supervising Engineer (W)
Divn-V, R.E. Sector, K.M.D.A.

BAR...
QUALITY

BARANAGAR MUNICIPALITY

BITUMIN FILLER OF APPROVED THIN EXPANTION JOINTS INCLUDING FINISHING THE TOP SURFACE AS DIRECTED
CONSIDER 2.00MT APART WIDTH 12mm & DEPTH 100 mm

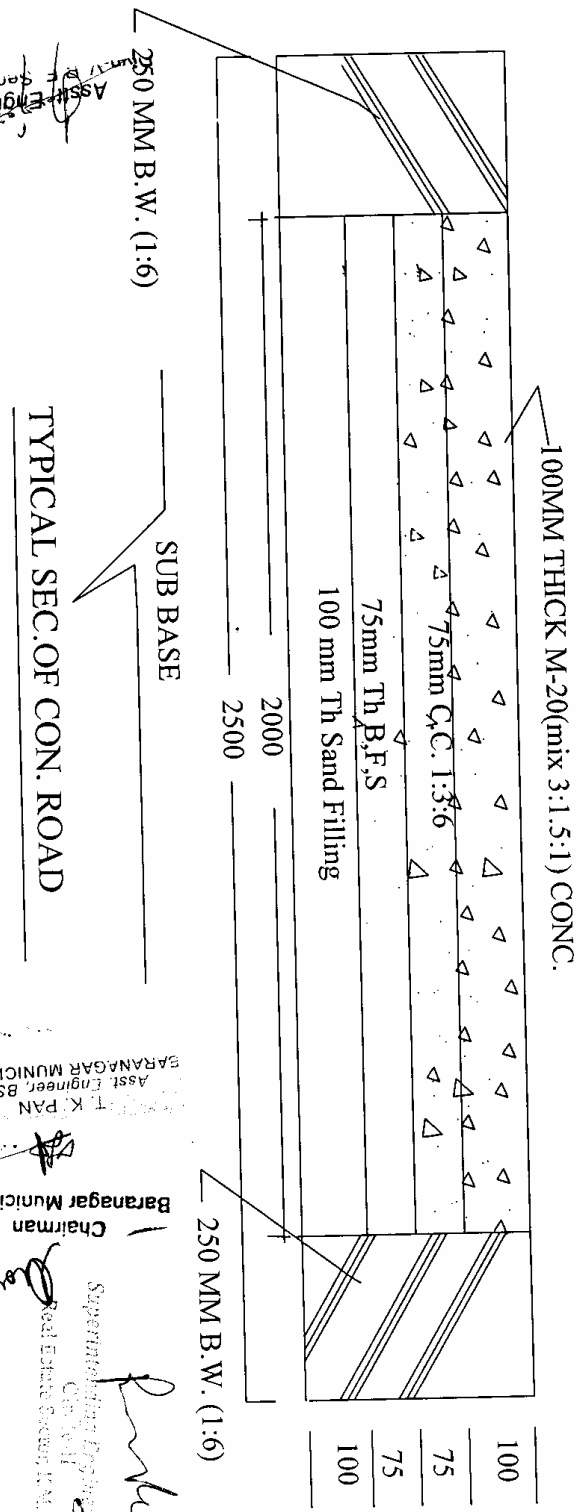

Assistant Engineer
 KMDA


T. K. PAN
 Asst. Engineer, BSUP
 BARANAGAR MUNICIPALITY

Chairman
 Baranagar Municipality

100
 75
 75
 100

BARANAGAR MUNICIPALITY


15mm TH CEMENT PLASTER IN C.M(4:1)
WITH 1.5 mm NEAT CEMENT

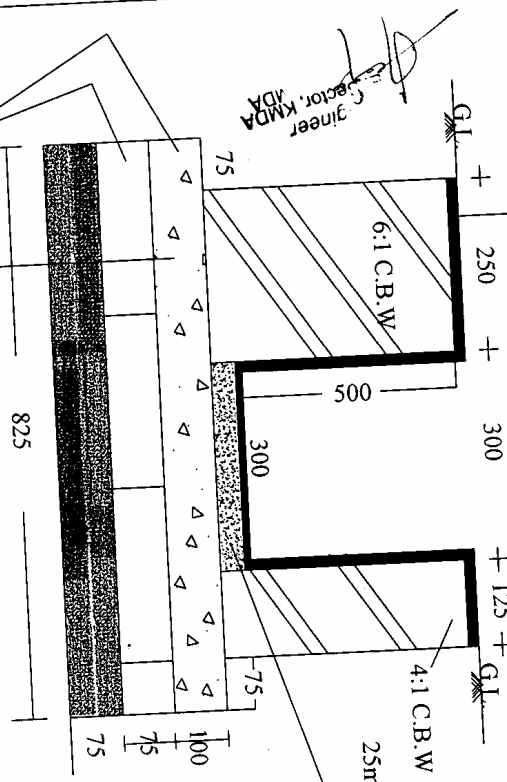

100 THICK JHAMA CONC. 1:3:6
OVER 75 THICK B.F.S OVER 75 Th.
SILVER SAND FILLING

TYPICAL SECTION OF DRAIN

15mm TH CEMENT PLASTER IN C.M(4:1)
WITH 1.5 mm NEAT CEMENT

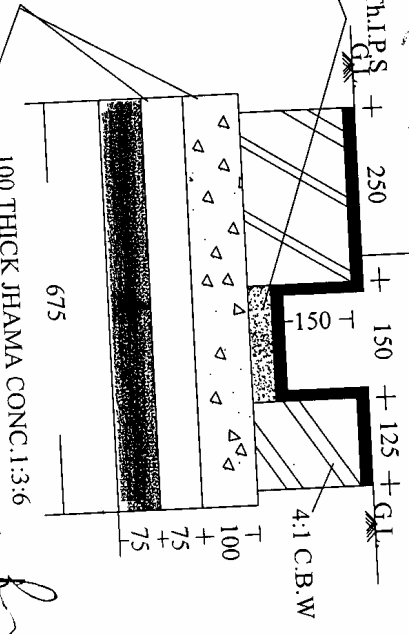

100 THICK JHAMA CONC. 1:3:6
OVER 75 THICK B.F.S OVER 75 Th.
SILVER SAND FILLING

TYPICAL SECTION OF DRAIN

Executive Engineer,
Muz. V. Feei Estate Sector,
K. M. D. A.

Baranagar Municipality
Chairman

BARANAGAR MUNICIPALITY